



PRO-MAX[®] SPECIALTY GROOVED TWO-SIDED GRILL

Model CG14SPT

Features/Benefits:

- ★ Split top design cooks a variety of products at the same time while allowing maximum control of different temperatures and times.
- ★ Grooved "Panini" Grill enhances the looks of your menu by adding sear marks to your sandwiches, wraps, chicken breasts, hamburgers or other menu items.
- ★ Heavy-duty aluminum platens provide superior performance and long life.
- ★ A counter balance hinge system provides safe and effortless operation of both top platens. Spacious grilling height accommodates product up to three inches.
- ★ Electronic programmable timer with four channels to set time and temperature. The timer counts down the cooking time and is equipped with an audible alarm to signal when timer reaches zero.
- ★ Easy to read digital thermostat is rated from 250°F(79°C) to 550°F (302°C).
- ★ Front grease trough and drawer for easy cleaning.
- ★ Stainless steel burn guard protects from accidental contact.



Model CG14SPT

Applications:

Star's Two-sided grill can prepare sandwiches, wraps, chicken breasts, hamburgers or any other menu items quickly. Split-top design allows cooking different menu items on the same grill.

Quality Construction:

The rugged body is constructed of 18 gauge stainless steel. The grill is supplied with grease trough and stainless steel grease drawer. The counter balance mechanism is constructed from hardened aluminum. The 6 foot lead-in cord has a special covering that is resistant to water and oil and the wires are protected by metallic braiding. Cord comes complete with plug (see typical specifications).

Warranty:


Star's Two-sided grill is covered by Star's one year parts and labor warranty.






Pro-Max® Specialty Grooved Two-Sided Grill


B



C

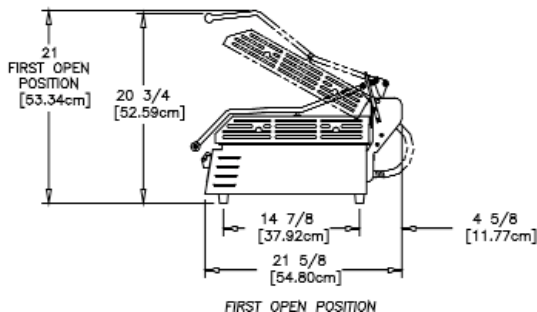

FIRST OPEN POSITION



□

FULL OPEN POSITION

Model No.	Grid Surface	(A) Width Inches (cm)	(B) Depth Inches (cm)	(C) Closed Inches (cm)	(D) Open Inches (cm)	Voltage	Wattage	Amps	NEMA Plug	Approximate Weight	
										Shipping lbs. (kg)	Installed lbs. (kg)
CG14SPT	Alum.	16	23-1/8	14-1/4	31-5/8	120V	2300	19.2	5-20P*	81	68
		(40.6)	(58.7)	(36.3)	(80.3)	120V	2300	19.2	5-30P**	(37.8)	(30.9)
						208/240	1725/2300	8.3/9.6	6-15P		
						230	2,100	9.2	CEE-7/VII		

** Canadian requirements.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Star Manufacturing exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

Phone: (800) 264-7827 - FAX: (800) 264-6666 - www.star-mfg.com